

The Fastest Line Matrix Printers in the (Real) World

T6200 Series



The T6212, T6215 and T6218 Line matrix printers are ground-breaking solutions for high-volume, mission-critical impact printing. Tally combines cutting-edge innovation with time-tested technology to make the T6212, T6215 and T6218 superior in speed, reliability, and quality. At 1200, 1500 and 1800 lines per minute (LPM) respectively, they actually outperform line printers rated at higher speeds when printing in “real world” applications. Outstanding throughput is made possible by technological advancements to the hammer bank and paper feed system.

As price/performance leaders, the T6212, T6215 and T6218 cost less to buy, less to service and less to use while setting new milestones in connectivity and functionality.

The patented Smart Ribbon 250 offers clean-hands ribbon cartridge convenience while delivering new ribbon quality over its entire 250 million character life — the longest life in the industry. With the widest range of printer emulations, impressive

- Monthly workloads to 512,000 pages
- Remarkable ECMA Spreadsheet throughput speeds over 44 pages per minute!
- Robust, highly efficient single-row hammer bank for exceptional reliability
- Exclusive “Smart Ribbon” technology for consistent print density
- Excellent connectivity options including Twinax/Coax, Ethernet, IPDS & IPDS over TCP/IP
- QMS Code V and Printronix Graphics Language (PGL) compatibility for industrial graphics and bar codes
- Read/Right bar code algorithm produces high quality bar codes with no loss of throughput
- 4-tractor system, straight paper path for excellent forms handling
- Ergonomically enhanced control panel and reversible doors for operator convenience.

network printer management, popular graphics languages and top-notch web administration utilities, the T6212, T6215 and T6218 can take on the challenge of line printers in any class, and win.


Tally[®]
Computer Printers

FEDERAL, STATE & LOCAL GOVERNMENT	MANUFACTURING, TRANSPORTATION/DISTRIBUTION	DIRECT MAIL/SERVICE BUREAUS
<ul style="list-style-type: none"> • ISO 9001 certified • Print tax forms, payroll checks, inventory reports and invoices • Energy Star compliant 	<ul style="list-style-type: none"> • Print pick lists, shipping labels and freight bills • Excellent readability on all industry standard bar codes • Jam-free operation • Operates in harsh environments • Handles inventory labels and heavy stock 	<ul style="list-style-type: none"> • USPS POSTNET bar code certified • Ideal for long, unattended print runs • Rugged design, high speed, high workload

The Ultimate in Speed, Reliability, Functionality Compatibility

Features & Specifications	T6212/T6215/T6218
Print Technology	Line impact dot matrix
Print Speed	T6212: 1200 lines per minute (text), 150 inches per minute (graphics) T6215: 1500 lines per minute (text), 187 inches per minute (graphics) T6218: 1800 lines per minute (text), 225 inches per minute (graphics)
Workload	T6212: 345,000 pages per month; T6215: 430,000 pages per month; T6218: 512,000 pages per month
Acoustic Level	T6212: 50 dB(A); T6215: 52 dB(A); T6218: 55 dB(A); per ISO 7779
Character Printing Modes	Constant density fonts; enhanced fonts
Character Sets	Over 1000 character sets
Characters Per Inch	5, 6, 6.7, 7.5, 8.3, 8.6, 10, 12, 13.3, 15, 16.7, 17.1, 20 cpi
Lines Per Inch	1.5, 2, 3, 4, 5, 6, 8, 9, 10 & 12 (plus variable line spacing)
Fonts	Draft, Data Processing, Courier, Gothic, OCR A & B
Character Styles	Bold, italic, superscript, subscript, underline, overline, strike through
Graphics Resolution	Maximum: 240 x 288 (H x V)
Graphics Compatibility	Tally Industrial Graphics; QMS® CODE V™ Version 2; Printronix® PGL
Bar Codes	Code 39, Code 128, Interleaved 2 of 5, UPC-A, UPC-E, EAN 8, EAN 13, EAN 128, Codabar, Identicon 2 of 5, MSI, POSTNET
Control Panel	Alphanumeric display (six languages) provides complete access to printer operation, configuration, calibration and test features. Includes lockout feature, 32 character 2 line display, save up to 10 unique configurations
Paper Handling	Straight paper path, four tractor system, paper out and paper motion detection, forms position retained in non-volatile memory
Print Media	Up to 6-part forms, forms thickness maximum .025", weight: 15-100 lb. stock
Paper Sizes	Width: 2.5" – 18.9", forms length: 1 – 255 lines
Paper Advance	Slew Speed: up to 36 inches per second
Standard Interfaces	Serial RS232 (up to 38.4K Baud) and IEEE 1284 Compliant Centronics Parallel (both ports hot, active port selected automatically)
Standard Emulations	Tally Line Matrix Printer, Tally Dot Matrix Printer, Printronix® P600 and P6000, HP 2564C, DEC® LG01, Epson® FX1180, Genicom® ANSI & IBM® Proprinter III XL
Ribbon	Easy-load, Smart Ribbon® clean-hands cartridges up to 250 million characters - ribbon fault detection
Physical (H x W x D)	40" x 28.2" x 28.3" T6212, T6215 – 185 lbs. shipping weight; T6218 – 212 lbs. shipping weight
Power Requirements	90 - 130/180 - 264 V, 57 - 63/47 - 53 Hz (auto-ranging)
Environmental	Temperature range: 10°C to 40°C (operating); -40°C to 66°C (non-operating) Humidity: 10% to 90% non-condensing (operating); 5% to 95% non-condensing (non-operating)
Optional Interfaces	FourPlex I/O: Twinax, Coax, Serial and Parallel, IPDS for FourPlex LANPlex I/O: Ethernet (10BaseT/100BaseT), Serial and Parallel, IPDS for LANPlex

Factory or User Installable I/O Modules

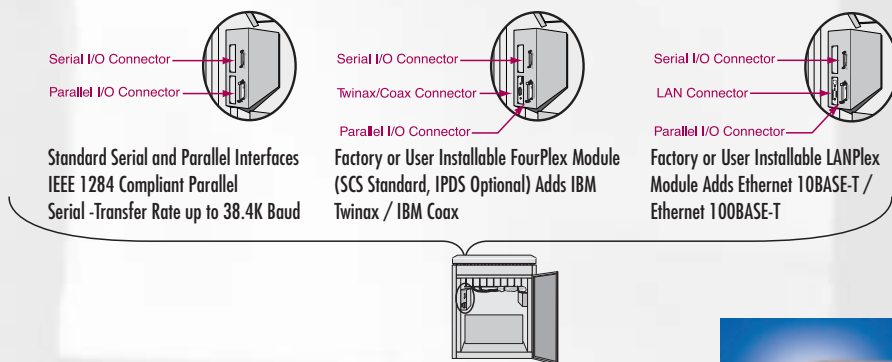

Tally®
Computer Printers

Tally Printer Corp.
8301 South 180th Street, P.O. Box 97018, Kent, WA 98064-9718
Telephone (425) 251-5524, 1-800-843-1347, Fax: (425) 251-5520
<http://www.tally.com>



T6212/T6215/T6218



BSEN ISO 9001: 1994
Certificate No. FM 28149



2/02. Specifications subject to change without further notice. All product and brand names are trademarks of the respective companies.